



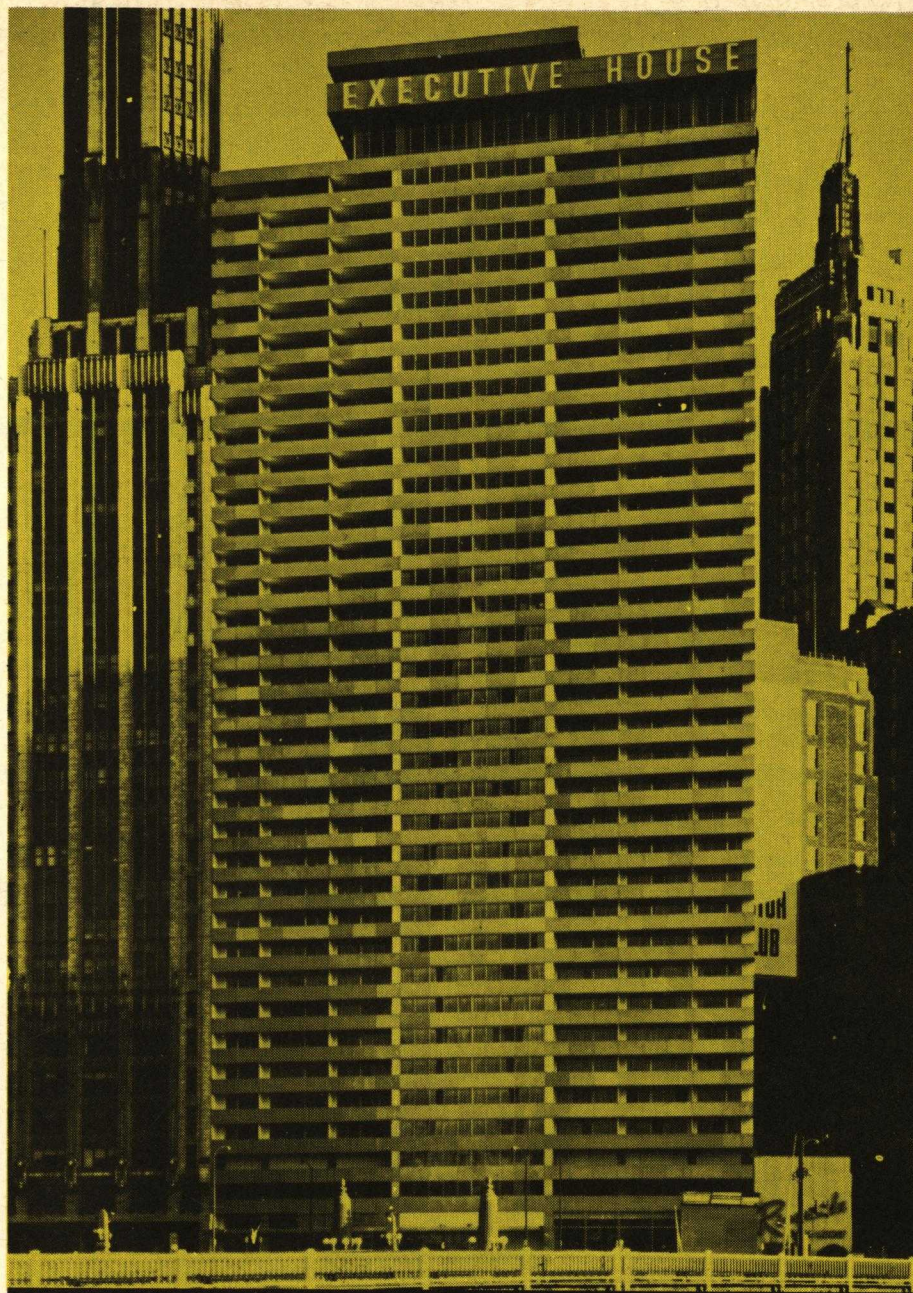

EXECUTIVE HOUSE CHICAGO Milton M. Schwartz & Assoc., Inc., Arch. • Wacker Const. Co., Contractor

EXTERIOR AND INTERIOR

Glass Walls
Glass SHOWER DOOR CO., INC. ALL PHONES FRANKLIN 2-0240
 105 W. WACKER DRIVE • CHICAGO 1, ILLINOIS

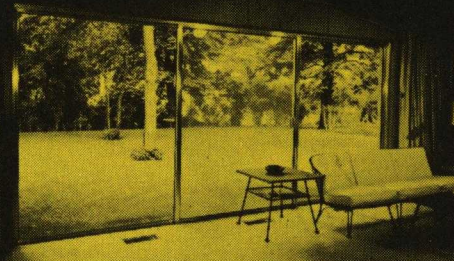


SLIDING



STATIONARY




INTERIOR - COMMERCIAL

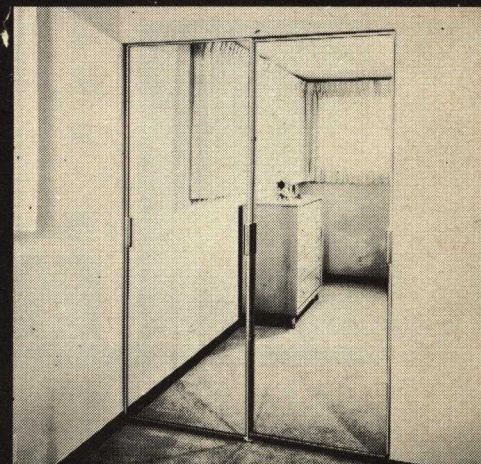

MIRRORED DOORS

CROSSROADS MOTEL CHICAGO Robert Blum & Co., Arch. & Builder

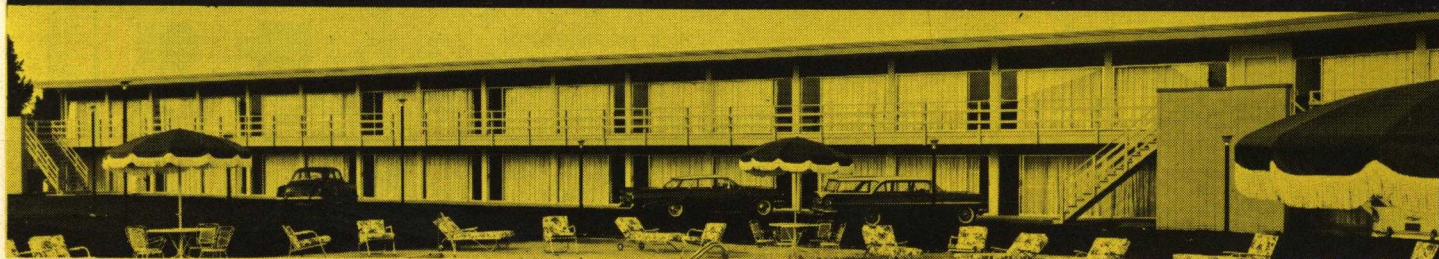



SLIDING GLASS DOORS

features

UTILITY: Finger-tip action Panels move silently on heavy duty, stainless steel roller bearings . . . close securely . . . self-locking. Heavy duty screen lifts out for cleaning glass—or for winter storage.


BEAUTY: Slender aluminum members. Modern styling and simplicity of design make GSD glass walls architecturally perfect for any setting.

QUALITY: Tested under the most difficult weather conditions, GSD sliding walls prove equal or superior to normal construction in every way. All frame sections of specially engineered Alumilited (heavy anodized) aluminum extrusions for rigidity, smooth operation and permanence. Pressure glazed with lifetime vinyl continuous seal, and weather-sealed with wool pile stripping throughout.

ECONOMY: GSD glass walls start off with surprisingly low initial cost . . . maintenance costs are held to a minimum . . . they never require painting, and cannot rust, warp, swell or split.




G2
TG2



G3
TG3




3G3
3TG3



G4
TG4

4
DOOR
•
2
TRACK

G4
TG4

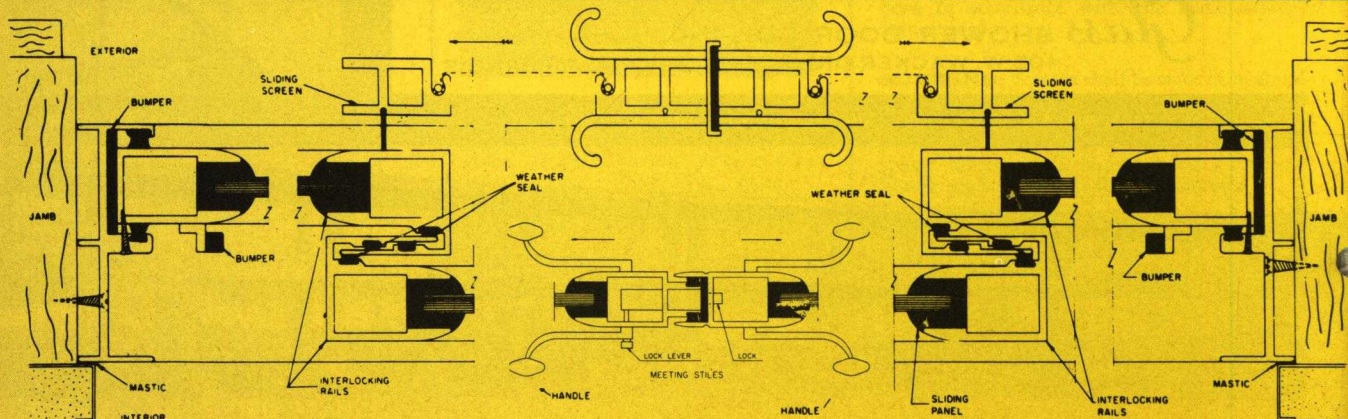


GLASS DETAILS

SCALE $\frac{3}{8}'' = 1''$


2
DOOR
•
2
TRACK

G2
TG2

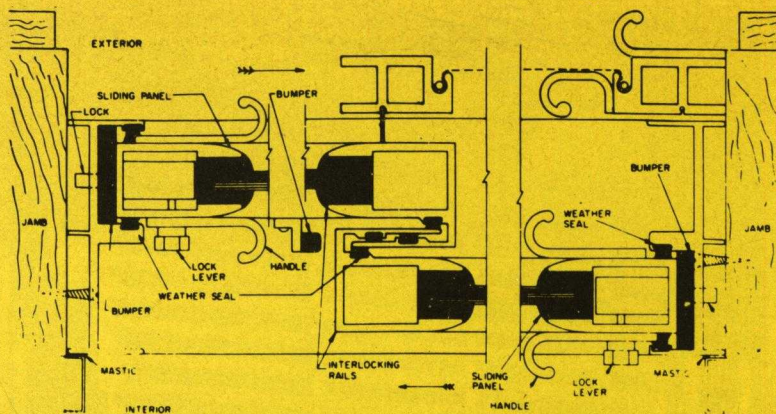


3
DOOR
•
2
TRACK

G3
TG3



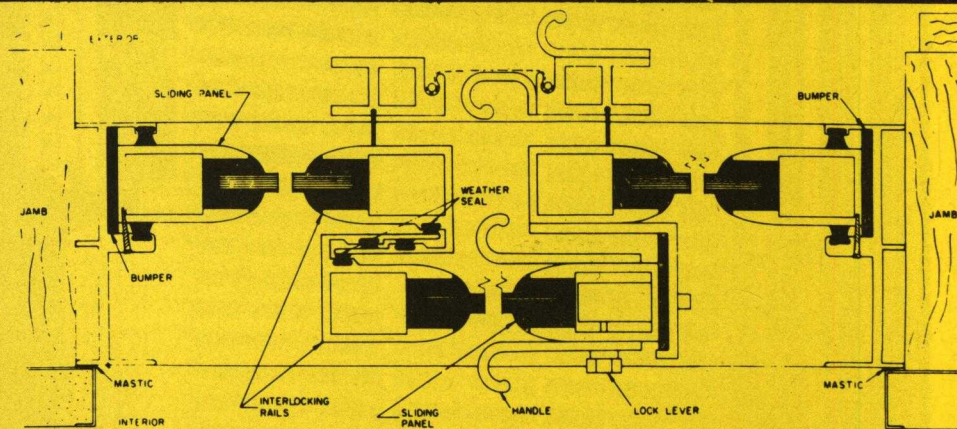


3
DOOR
•
3
TRACK

3G3
3TG3

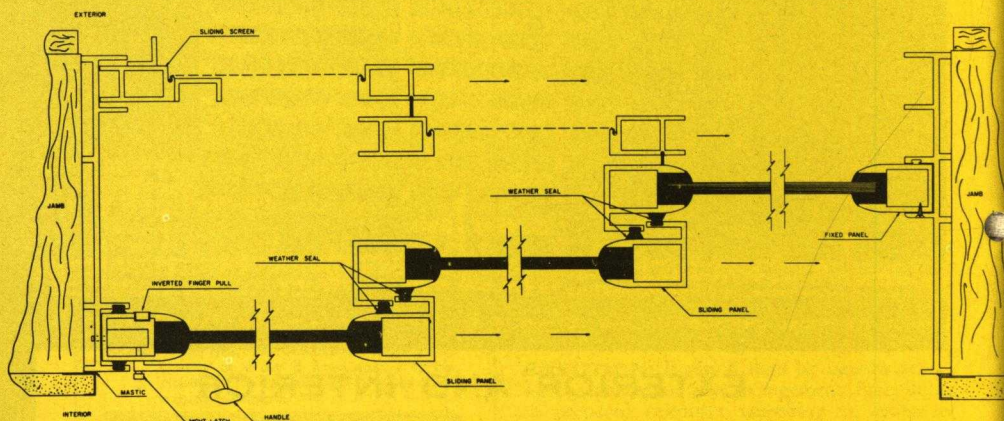

GLASS WALLS AND DOORS

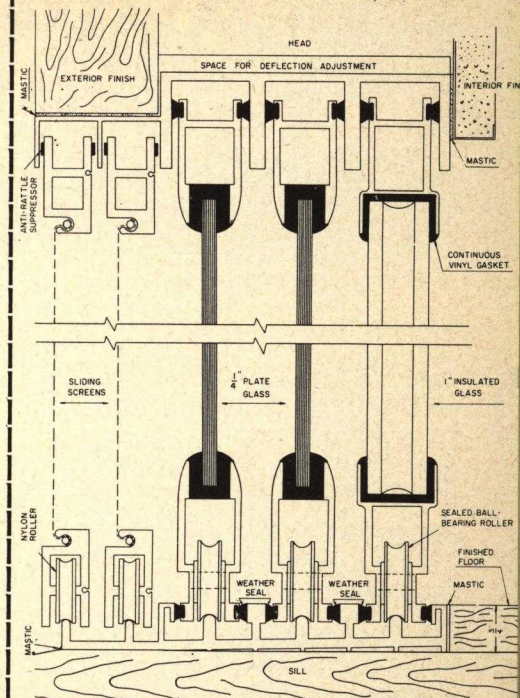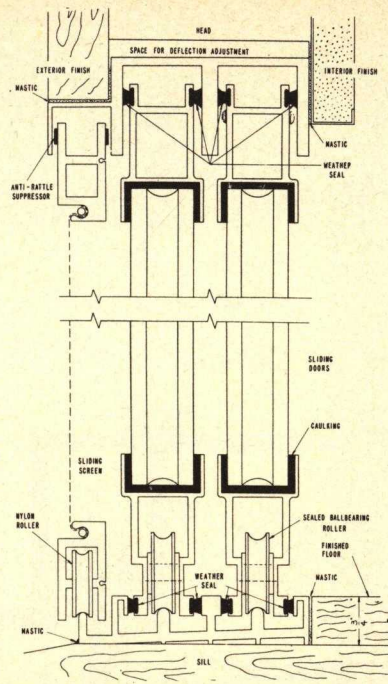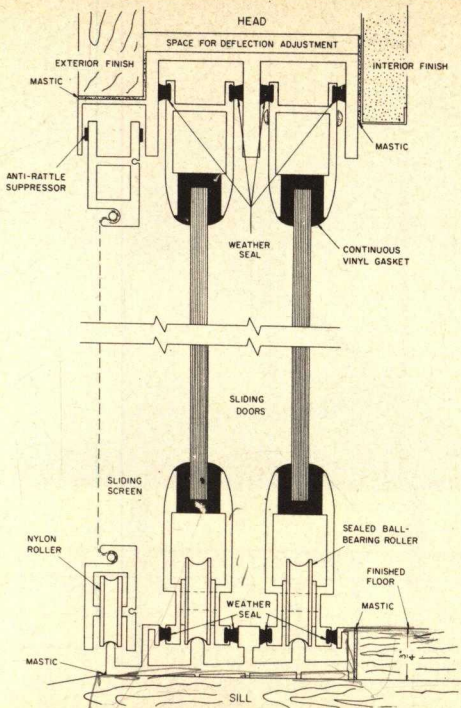

For 1/4" plate glazing

NO.	WIDTH	HEIGHT	GLASS SIZE
G-2	6'0"	6'8"	33 3/4" x 75"
G-2	8'	6'8"	45 3/4" x 75"
G-2	10'0"	6'8"	57 3/4" x 75"
G-2	12'0"	6'8"	69 3/4" x 75"
G-2	6'0"	8'2"	33 3/4" x 93"
G-2	8'	8'2"	45 3/4" x 93"
G-2	10'0"	8'2"	57 3/4" x 93"
G-2	12'0"	8'2"	69 3/4" x 93"
G-3	8'10 5/8"	6'8"	33 3/4" x 75"
G-3	11'10 5/8"	6'8"	45 3/4" x 75"
G-3	14'10 5/8"	6'8"	57 3/4" x 75"
G-3	17'10 5/8"	6'8"	69 3/4" x 75"
G-3	8'10 5/8"	8'2"	33 3/4" x 93"
G-3	11'10 5/8"	8'2"	45 3/4" x 93"
G-3	14'10 5/8"	8'2"	57 3/4" x 93"
G-3	17'10 5/8"	8'2"	69 3/4" x 93"
G-4	11'11 3/8"	6'8"	33 3/4" x 75"
G-4	15'11 3/8"	6'8"	45 3/4" x 75"
G-4	19'11 3/8"	6'8"	57 3/4" x 75"
G-4	23'11 3/8"	6'8"	69 3/4" x 75"
G-4	11'11 3/8"	8'2"	33 3/4" x 93"
G-4	15'11 3/8"	8'2"	45 3/4" x 93"
G-4	19'11 3/8"	8'2"	57 3/4" x 93"
G-4	23'11 3/8"	8'2"	69 3/4" x 93"

For 1" Thermopane or Twindow

NO.	WIDTH	HEIGHT	GLASS SIZE
TG-2	6'4 3/8"	6'8"	36" x 75"
TG-2	8'4 5/8"	6'8"	48 1/8" x 75"
TG-2	10'5 1/8"	6'8"	60 3/8" x 75"
TG-2	6'4 3/8"	8'2"	36" x 93"
TG-2	8'4 5/8"	8'2"	48 1/8" x 93"
TG-2	10'5 1/8"	8'2"	60 3/8" x 93"
TG-3	9'5 3/8"	6'8"	36" x 75"
TG-3	12'5 3/4"	6'8"	48 1/8" x 75"
TG-3	15'6 1/2"	6'8"	60 3/8" x 75"
TG-3	9'5 3/8"	8'2"	36" x 93"
TG-3	12'5 3/4"	8'2"	48 1/8" x 93"
TG-3	15'6 1/2"	8'2"	60 3/8" x 93"
TG-4	12'8 1/2"	6'8"	36" x 75"
TG-4	16'9"	6'8"	48 1/8" x 75"
TG-4	20'10"	6'8"	60 3/8" x 75"
TG-4	12'8 1/2"	8'2"	36" x 93"
TG-4	16'9"	8'2"	48 1/8" x 93"
TG-4	20'10"	8'2"	60 3/8" x 93"

For 1" Thermopane or Twindow

NO.	WIDTH	HEIGHT	GLASS SIZE
3TG-3	9'5 3/8"	6'8"	36" x 75"
3TG-3	12'5 3/4"	6'8"	48 1/8" x 75"
3TG-3	15'6 1/2"	6'8"	60 3/8" x 75"
3TG-3	9'5 3/8"	8'2"	36" x 93"
3TG-3	12'5 3/4"	8'2"	48 1/8" x 93"
3TG-3	15'6 1/2"	8'2"	60 3/8" x 93"

For 1/4" plate glazing

NO.	WIDTH	HEIGHT	GLASS SIZE
3G-3	8'10 5/8"	6'8"	33 3/4" x 75"
3G-3	11'10 5/8"	6'8"	45 3/4" x 75"
3G-3	14'10 5/8"	6'8"	57 3/4" x 75"
3G-3	17'10 5/8"	6'8"	69 3/4" x 75"
3G-3	8'10 5/8"	8'2"	33 3/4" x 93"
3G-3	11'10 5/8"	8'2"	45 3/4" x 93"
3G-3	14'10 5/8"	8'2"	57 3/4" x 93"
3G-3	17'10 5/8"	8'2"	69 3/4" x 93"

SPECIFICATIONS

GENERAL: All doors and closure panels, both sliding and stationary, shall be as manufactured by GLASS SHOWER DOOR CO.

MATERIAL: All sections shall be of extruded 6063 aluminum. Fasteners shall be of stainless steel or other non-corrosive metal.

FINISH: All units shall be Alumilited (heavy anodized) finish.

HARDWARE: All sliding doors shall be equipped with inner-and-outer lifetime finish gold Anoplat grip-contoured handles and tamper-proof, adjustable, night latch. Cylinder locks optional at additional cost.

CONSTRUCTION: Shall be of uniform and symmetrical design. All sections shall be of continuous lengths within manufacturer's specified limits. All corners shall be precision milled and held square and rigid with unexposed heavy corner angles and No. 10-32 machine screws. Sliding doors shall be lift-out, bottom-roller type, operating on heavy duty tandem roller bearings. Anti-rattle suppressors shall be mounted on top of sliding panels to insure silent operation. All sliding sections shall be of interlocking design.

INSULATION: All pertinent sections shall be weather stripped with mounted Schlegel mohair piling to insure positive weather seal throughout.

SCREENS: Shall be of extruded aluminum frames with No. 16 mesh aluminum wire screening. Screens shall roll on bottom track on Nylon bearings with Nylon guides at top.

ERECTION: Excluded, except where erection by the manufacturer is specified. All units shall be erected exactly plumb and level in accordance with the manufacturer's instructions. Caulking shall be furnished by others.



GLAZING: Excluded, except where glazing by the manufacturer is specified. All units shall be glazed by others in accordance with the manufacturer's instructions.

SHIPPING: All units are shipped K.D., ready for field assembly and installation.

SLIDING MIRRORED INTERIOR DOORS

by-passing! for closets! room dividers!

- 100% by-passing — no stops or overlap
- Each panel glides on 4 whisper-quiet, overhead ball-bearing rollers, mounted in pairs on self-levelling brackets
- Vertical roller adjustment $\frac{5}{8}$ "
- Frames finished in fine mat Anoplate; handles in contrasting bright Anoplate
- Available K.D. (less mirrors and hardboard) or completely assembled
- Standard sizes available from stock; custom sizes on request

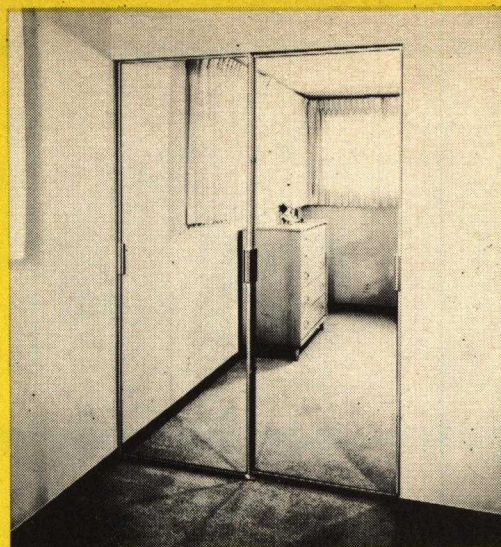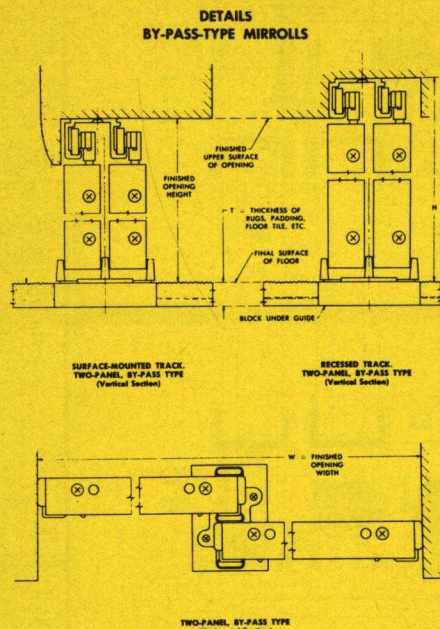

Standard Sizes

	WIDTH (a)	HEIGHT (b)
	3' — 4' — 5'	6'8" — 6'9 1/4"
	6' — 7' — 8'	8' or 8'1 1/4"
	10' — 12'	


(a) Measured as the finished opening.

(b) Measured as top of track (recessed or not) to final floor surface, allowing for floor-tile, rugs, etc

STATIONARY WALLS AND FRAMES

for store fronts • curtain walls • picture walls
residential • commercial • industrial

- Custom symmetrical patterns with application of mullions afford unusual exterior and interior wall design
- Sections match sliding glass walls perfectly
- Custom and standard size in height and width
- Alumilited (heavy anodized) finish
- Furnished K.D. or glazed as specified



PARTIAL LIST OF MAJOR INSTALLATIONS

BISMARCK HOTEL, Chicago
BLACKSTONE HOTEL, Omaha
BURTON DIXIE CO., Chicago
CROSSROADS MOTEL, Chicago
CURTISS HOTEL, Minneapolis
DRAKE HOTEL, Chicago
EXECUTIVE HOUSE, Chicago
KEARNY HOUSING PROJECT, Tucson
MERCHANDISE MART, Chicago
RADISSON HOTEL, Minneapolis
SYLVANIA CORP., Chicago

GSD is a pioneer in the construction of sliding and stationary glass walls, doors and partitions.

With years of experience, has come the ability to furnish units of permanent beauty and endurance.

Available in stock sizes and custom sizes, and for most custom applications. They afford the user many avenues of distinction and utility.

FOR SHOWER DOORS, TUB ENCLOSURES, AND MEDICINE CHESTS, SEE OUR CATALOG IN SECTION 112c

Glass SHOWER DOOR CO., INC. 105 W. WACKER DRIVE • CHICAGO 1

ALL PHONES FRANKLIN 2-0240

Digitized by:



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Carol J. Dyson, AIA